ACTIV MENU SETTINGS

Recommended settings for :

Harris Nexio

HiTech Systems Limited

Smarter Live Production Technology

SERVER SETTINGS:
Louth or VDCP
port id 1-4 in controller mapped directly to RS422 control ports 1-4 on Nexio
Odetics not supported by Nexio
Variable ids lengths can be turned OFF to read 8 character clip reference (for example %00001278)

Software version [ ] Serial number [ ]

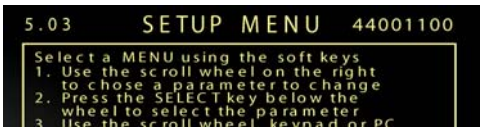

Open menu, from CLIP LIST press SHIFT + ENTER
or for Cartbox, press SHIFT + S5

VDCP

PARAMETER	RECOMMENDED VALUE	YOUR SETTINGS	LOCATION
DEVICE TYPE	*Set as required*	[ ]	CHANNEL MENU
VIDEO PORT NUMBER	1	[ ]	
DISK PROTOCOL	VDCP		DISK MENU
TIMECODE	*Set as required*	[ ]	
JOG WHEEL COMMAND	RATE		
GOTO CUE COMMAND	CUE WITH DATA	[ ]	
STILL AFTER LOAD	YES	[ ]	
VARIABLE ID LENGTHS	ON	[ ]	
PLAYLIST LOAD	00:00:05:00	[ ]	
PLAYLIST CHANGE	00:00:00:05	[ ]	
PLIST USE MEDIA OUT	YES		
CUE END LATENCY	00:00:00:07	[ ]	
COMMS TIMEOUT	10 mSec	[ ]	
LOAD LATENCY	5 frames	[ ]	
VIDEO STANDARD	*PAL / NTSC*	[ ]	SYSTEM MENU
LICENCE OPTIONS	*View enabled options*		

ODETICS

DEVICE TYPE	*Set as required*	[ ]	CHANNEL MENU
DISK PROTOCOL	ODETICS		DISK MENU
TIMECODE	*Set as required*	[ ]	
PLAYLIST LOAD	00:00:05:00	[ ]	
CUE END LATENCY	00:00:00:01	[ ]	
EJECT DELAY	0 mSec	[ ]	
LOAD LATENCY	*Set as required*	[ ]	
CUE COMMAND	NEW (44 14)	[ ]	
VIDEO STANDARD	*PAL / NTSC*	[ ]	SYSTEM MENU
LICENCE OPTIONS	*View enabled options*		

Last Updated March 2007