ACTIV MENU SETTINGS

Recommended settings for :

Omneon

Smarter Live Production Technology

SERVER SETTINGS: NOTE:Supports Play and Record on the same VDCP channel
For wireing directly into server port without 2 adaptors.

Hi Tech		Omneon
2	-	5
8	-	1
3	-	3
7	-	8

Software version [ ] Serial number [ ]

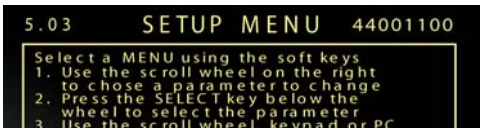

Open menu, from CLIP LIST press SHIFT + ENTER
or for Cartbox, press SHIFT + S5

VDCP

PARAMETER	RECOMMENDED VALUE	YOUR SETTINGS	LOCATION
DEVICE TYPE	*Set as required*	[ ]	CHANNEL MENU
VIDEO PORT NUMBER	1	[ ]	
DISK PROTOCOL	VDCP		DISK MENU
TIMECODE	*Set as required*	[ ]	
GOTO COMMAND	JOG	[ ]	
VARIABLE ID LENGTHS	ON	[ ]	
PLAYLIST LOAD	00:00:05:00	[ ]	
PLAYLIST CHANGE	00:00:00:05	[ ]	
CUE END LATENCY	00:00:00:20	[ ]	
LOAD LATENCY	5 frames	[ ]	
VIDEO STANDARD	*PAL / NTSC*	[ ]	SYSTEM MENU
LICENCE OPTIONS	*View enabled options*		

ODETICS

DEVICE TYPE	*Set as required*	[ ]	CHANNEL MENU
DISK PROTOCOL	ODETICS		DISK MENU
TIMECODE	*Set as required*	[ ]	
PLAYLIST LOAD	00:00:05:00	[ ]	
CUE END LATENCY	00:00:00:01	[ ]	
EJECT DELAY	0 mSec	[ ]	
CUE COMMAND	NEW (44 14)	[ ]	
VIDEO STANDARD	*PAL / NTSC*	[ ]	SYSTEM MENU
LICENCE OPTIONS	*View enabled options*		

VTR

DEVICE TYPE	VTR		CHANNEL MENU
TIMECODE	*Set as required*	[ ]	VTR MENU
FRAME OFFSET	00:00:00:02	[ ]	
CUE END LATENCY	00:00:00:01	[ ]	
LIVE TC SOURCE	TC GEN	[ ]	
VIDEO STANDARD	*PAL / NTSC*	[ ]	SYSTEM MENU
LICENCE OPTIONS	*View enabled options*		